

**Style:**

008-Concentric Reducer (Grooved)

009-Concentric Reducer (Threaded)

**Size:**

- DN65\*40-DN300\*200I 2\*1 1/4-12\*10''-008
- DN40\*25-DN300\*200I 1 1/4\*1-12\*10''-009

**Maximum Working Pressure:**

- 2.5Mpa /350psi

**Approvals:** FM/UL

**Material Specifications****Fittings:**

Ductile iron confirming to ASTM A536, Grade 65-45-12, other material also available, please consult VISION.

**Coating:**


Orange-Standard

Red- Optional

Hot-Dipped, Zinc Galvanized-Optional

# Concentric Reducer (G) Style 008

# VISION

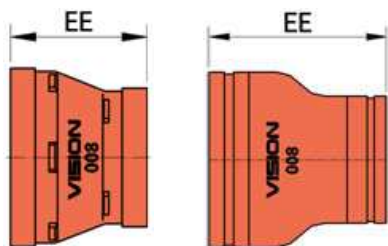

OD	EE	Approx. Wt. Ea.
In/mm	In/mm	Lbs./kg
2x1½	2.52	0.7
60.3x42.4	64	0.3
2x1½	2.52	0.7
60.3x48.3	64	0.3
2½x1½	2.52	0.9
73.0x42.4	64	0.4
2½x1½	2.52	0.9
73.0x48.3	64	0.4
2½x2	2.52	1.1
73.0x60.3	64	0.5
3ODx1½	2.52	0.9
76.1x42.4	64	0.4
3ODx1½	2.52	0.9
76.1x48.3	64	0.4
3ODx2	2.52	1.1
76.1x60.3	64	0.5
3x1½	2.52	0.9
88.9x42.4	64	0.4
3x1½	2.52	0.9
88.9x48.3	64	0.4
3x2	2.52	1.1
88.9x60.3	64	0.5
3x2½	2.52	1.3
88.9x73.0	64	0.6
3x3OD	2.52	1.3
88.9x76.1	64	0.6
4x1½	2.99	2.2
114.3x42.4	76	1
4x2	2.99	2.4
114.3x60.3	76	1.1
4x2½	2.99	2.6
114.3x73.0	76	1.2
4x3OD	2.99	2.6
114.3x76.1	76	1.2
4x3	2.99	3.1
114.3x88.9	76	1.4


OD	EE	Approx. Wt. Ea.
In/mm	In/mm	Lbs./kg
5½ODx2	7.76	7.7
139.7x76.1	197 #	3.5
5½ODx3OD	7.76	8.4
139.7x76.1	197 #	3.8
5½ODx3	7.76	9
139.7x88.9	197 #	4.1
5½ODx4	3.5	3.7
139.7x114.3	89	1.7
5x2	7.76	7.7
141.3x60.3	197 #	3.5
5x2½	7.76	8.6
141.3x73.0	197 #	3.9
5x3	7.76	9.3
141.3x88.9	197 #	4.2
5x4	3.5	3.7
141.3x114.3	89	1.7
6½ODx3OD	4.02	5.1
165.1x76.1	102	2.3
6½ODx3	4.02	5.7
165.1x88.9	102	2.6
6½ODx4	4.02	6.2
165.1x114.3	102	2.8
6½ODx5½OD	4.02	6.4
165.1x139.7	102	2.9
6x2	4.02	4.8
168.3x60.3	102	2.2
6x2½	4.02	4.8
168.3x73.0	102	2.2
6x3OD	4.02	5.1
168.3x76.1	102	2.3
6x3	4.02	5.7
168.3x88.9	102	2.6
6x4	4.02	6.2
168.3x114.3	102	2.8
6x5½OD	8.27	14.3
168.3x139.7	210 #	6.5

OD	EE	Approx. Wt. Ea.
In/mm	In/mm	Lbs./kg
8x2	5	10.1
219.1x60.3	127	4.6
8x3OD	5	10.4
219.1x76.1	127	4.7
8x3	5	10.6
219.1x88.9	127	4.8
8x4	5	10.8
219.1x114.3	127	4.9
8x5½OD	5	11.2
219.1x139.7	127	5.1
8x6½OD	5	11.5
219.1x165.1	127	5.2
10x4	10.35	23.3
273.0x114.3	263 #	10.6
10x5½OD	10.35	24.7
273.0x139.7	263 #	11.2
10x5	10.35	24.9
273.0x141.3	263 #	11.3
10x6½OD	10.35	26.4
273.0x165.1	263 #	12
10x6	10.35	26.4
273.0x168.3	263 #	12
10x8	10.35	30.3
273.0x219.1	263 #	13.7
12x4	11.34	30.6
323.9x114.3	288 #	13.9
12x5	11.34	32.4
323.9x141.3	288 #	14.7
12x6½OD	11.34	34
323.9x165.1	288 #	15.5
12x6	11.34	34
323.9x168.3	288 #	15.5
12x8	11.93	39.7
323.9x219.1	303 #	18
12x10	11.93	46.4
323.9x273.0	303 #	21.1



# Concentric Reducer (T) Style 009

# VISION

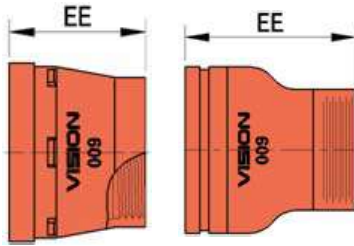

OD	EE	Approx. Ea.	Wt.
In/mm	In/mm	Lbs./kg	
1½x1	2.52	0.4	
42.4x33.7	64	0.2	
1½x1	2.52	0.4	
48.3x33.7	64	0.2	
1½x1¼	2.52	0.7	
48.3x42.4	64	0.3	
2x1	2.52	0.7	
60.3x33.7	64	0.3	
2x1¼	2.52	0.7	
60.3x42.4	64	0.3	
2x1½	2.52	0.7	
60.3x48.3	64	0.3	
2½x1	2.52	0.9	
73.0x33.7	64	0.4	
2½x1¼	2.52	0.9	
73.0x42.4	64	0.4	
2½x1½	2.52	0.9	
73.0x48.3	64	0.4	
2½x2	2.52	1.1	
73.0x60.3	64	0.5	
3ODx1	2.52	0.9	
76.1x33.7	64	0.4	
3ODx1¼	2.52	0.9	
76.1x42.4	64	0.4	
3ODx1½	2.52	0.9	
76.1x48.3	64	0.4	
3ODx2	2.52	0.9	
76.1x60.3	64	0.4	
3x1	2.52	0.9	
88.9x33.7	64	0.4	
3x1¼	2.52	1.1	
88.9x42.4	64	0.5	
3x1½	2.52	1.1	
88.9x48.3	64	0.5	
3x2	2.52	1.1	
88.9x60.3	64	0.5	
4x1	2.99	2.2	
114.3x33.7	76	1	
4x1¼	2.99	2.4	
114.3x42.4	76	1.1	
4x1½	2.99	2.4	
114.3x48.3	76	1.1	

OD	EE	Approx. Ea.	Wt.
In/mm	In/mm	Lbs./kg	
4x2	2.99	2.6	
114.3x60.3	76	1.2	
5½ODx1	3.5	3.7	
139.7x33.7	89	1.7	
5½ODx1¼	3.5	3.7	
139.7x42.4	89	1.7	
5½ODx1½	3.5	3.7	
139.7x48.3	89	1.7	
5½ODx2	3.5	3.7	
139.7x60.3	89	1.7	
5x1	3.5	3.7	
141.3x60.3	89	1.7	
5x1¼	3.5	3.7	
141.3x42.4	89	1.7	
5x1½	3.5	3.7	
141.3x48.3	89	1.7	
5x2	3.5	3.7	
141.3x60.3	89	1.7	
6½ODx1	4.02	4.9	
165.1x33.7	102	2.2	
6½ODx1¼	4.02	4.9	
165.1x42.4	102	2.2	
6½ODx1½	4.02	5.1	
165.1x48.3	102	2.3	
6½ODx2	4.02	5.3	
165.1x60.3	102	2.4	
6x1	4.02	4.9	
168.3x33.7	102	2.2	
6x1¼	4.02	4.9	
168.3x42.4	102	2.2	
6x1½	4.02	5.1	
168.3x48.3	102	2.3	
6x2	4.02	5.3	
168.3x60.3	102	2.4	
8x1	5	9.7	
219.1x33.7	127	4.4	
8x1¼	5	9.7	
219.1x42.4	127	4.4	
8x1½	5	9.9	
219.1x48.3	127	4.5	
8x2	5	10.1	
219.1x60.3	127	4.6	

