

Grooved End of Run Elbow Style 006RT

VISION



Style 006RT is applied to the end of sprinkler in Fire fighting system. also applied to other systems without specified curvature radii and specified flow resistance loss. Radius of Style 006RT is 0.75D. Normal size of VISION style 006RT is Ductile iron casting, Flow resistance is tested and proven on VISION style 006RT. Please refer to Technical Specification and Size for details.



Size:

- DN42.4×21.3-76.1×33.4mm | 1¼×½"-3OD×1"

Maximum Working Pressure:

- 8.6MPa(1250psi)
- Working pressure depend on material, wall thickness and pipe size

Material Specifications

Housing:

Ductile iron confirming to ASTM A536, Grade 65-45-12, other material also available, please consult VISION.

Coating:

Orange-Standard

Red- Optional

Hot-Dipped, Zinc Galvanized-Optional



Shanghai Vision Mechanical Joint Ltd., Co.,


Address: Jinlan Rd. 221, Jiading Industrial Park, Shanghai, China

Tel: 0086-21-5954-6862, 5954-6811, Fax: 0086-21-5954-3888 Web: www.visionmfr.com

D-1025E

Grooved End of Run Elbow Style 006RT

VISION

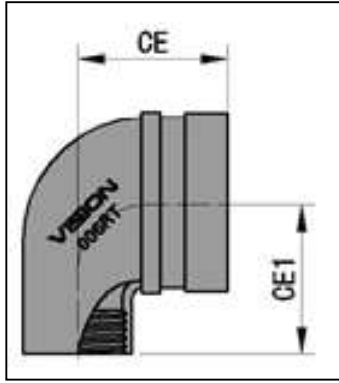

规格			006RT型 喷淋末端弯头			
实际外径公称直径			CE	CE1	约重	流阻等 效长度
mm	x	mm	mm	mm	kg	m
Inches		Inches	Inches	Inches	Lbs.ft	ft
42.4	x	21.3	48	32	0.3	0.9
1 1/4		1/2	1.89	1.26	0.7	3.0
		26.7	51	34	0.3	0.9
		3/4	2.01	1.34	0.7	3.0
		33.4	54.5	36	0.3	0.9
		1	2.15	1.42	0.7	3.0
48.3	x	21.3	48	35	0.3	0.9
1 1/2		1/2	1.89	1.38	0.7	3.0
		20	51	37	0.4	0.9
		3/4	2.01	1.46	0.9	3.0
		25	54.5	39.5	0.4	—
		1	2.15	1.56	0.9	—
60.3	x	21.3	48	35	0.4	1.2
2		1/2	1.89	1.38	0.9	3.9
		20	51	37	0.4	—
		3/4	2.01	1.46	0.9	—
		25	51	45.5	0.4	—
		1	2.01	1.79	0.9	—
73.0	x	21.3	48	47	0.5	—
2 1/2		1/2	1.89	1.85	1.1	—
		26.7	51	49	0.5	—
		3/4	2.01	1.93	1.1	—
		33.4	54.5	54.5	0.5	—
		1	2.15	2.15	1.1	—
76.1	x	21.3	48	49	0.6	—
3OD		1/2	1.89	1.93	1.3	—
		26.7	51	51	0.6	—
		3/4	2.01	2.01	1.3	—
		33.4	54.5	53.5	0.6	—
		1	2.15	2.11	1.3	—

