




Style 705M Pipe Clamp is two-pieces design to clamp pipeline by tightening nuts in both sides, which recommended for horizontal suspension of cold pipe lines or hot pipe lines where no insulation is required. Style 705M also recommended for seismic bracing.

- Two-pieces structure design, easy installation.
- Simplified design with two Galvanized bolts and nuts.
- Finish: Electro-Galvanized or Plain.
- Size: 3/4" -12"

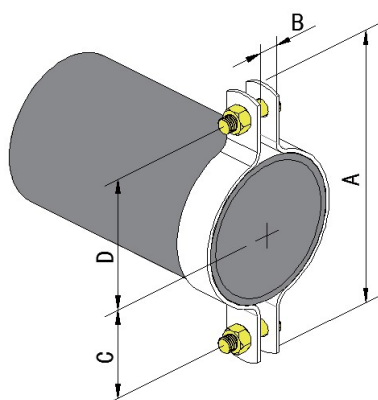

Pipe Size	A	B	C	D	Max Load	Approx. Wt. Ea.
In/mm	In/mm	In/mm	In/mm	In/mm	Lbf/N	Lbs./kg
¾	3.46	0.47	1.10	1.26	500	0.29
20	88.0	12.0	28.0	32.0	2223	0.13
1	3.54	0.47	1.10	1.38	500	0.29
25	90.0	12.0	28.0	35.0	2223	0.13
1¼	4.13	0.47	1.42	1.61	500	0.33
32	105.0	12.0	36.0	41.0	2223	0.15
1½	4.25	0.47	1.57	1.69	800	0.37
40	108.0	12.0	40.0	43.0	3555	0.17
2	5.51	0.47	2.13	2.13	1040	0.90
50	140.0	12.0	54.0	54.0	4620	0.41
2½	6.54	0.63	2.64	2.64	1040	0.97
65	166.0	16.0	67.0	67.0	4620	0.44
3	7.01	0.63	2.87	2.87	1040	1.12
80	178.0	16.0	73.0	73.0	4620	0.51
3½	7.64	0.63	3.19	3.19	1040	1.17
90	194.0	16.0	81.0	81.0	4620	0.53
4	8.50	0.63	3.50	3.50	1040	1.43
100	216.0	16.0	89.0	89.0	4620	0.65
5	9.84	0.75	4.17	4.17	1040	2.54
125	250.0	19.0	106.0	106.0	4620	1.15
6	11.50	0.75	4.88	4.88	1615	4.50
150	292.0	19.0	124.0	124.0	7178	2.04
8	13.78	0.75	5.98	5.98	1615	5.45
200	350.0	19.0	152.0	152.0	7178	2.47
10	17.09	0.98	7.44	7.44	2490	10.71
250	434.0	25.0	189.0	189.0	11065	4.86
12	19.13	0.98	8.43	8.43	2490	13.56
300	486.0	25.0	214.0	214.0	11065	6.15