




Style 703 Clevis Hanger is two-pieces structure design and assembly by clevis bolt, which can provide linear movement to accommodate pipeline Expansion/Contraction, also accommodate heavy load piping system, It is recommended for horizontal suspension of Non-insulated stationary pipe line.

- Two-pieces structure design, Carbon steel.
- Clevis shape design with standard load
- Assembly by Bolt and nut with Galvanized coating.
- Finish: Electro-Galvanized or Plain.
- Size: 3/4" -12"

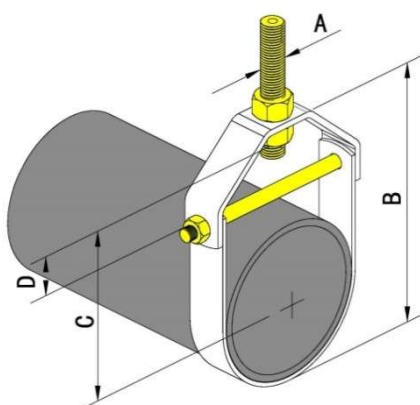

Pipe Size	Rod Size A	B	C	D	Width	Max Load	Approx. Wt. Ea.
In/mm	In/mm	In/mm	In/mm	In/mm	In/mm	Lbf/N	Lbs./kg
1/4	3/8	2.76	1.61	0.67	0.87	610	0.22
20	M10	70.0	41.0	17.0	22.0	2713	0.10
1	3/8	3.27	1.89	0.87	0.87	730	0.27
25	M10	83.0	48.0	22.0	22.0	3247	0.12
1 1/4	3/8	3.15	1.85	0.71	0.87	730	0.26
32	M10	80.0	47.0	18.0	22.0	3247	0.12
1 1/2	3/8	3.54	2.09	0.79	0.87	730	0.31
40	M10	90.0	53.0	20.0	22.0	3247	0.14
2	3/8	4.37	2.64	0.98	0.87	730	0.34
50	M10	111.0	67.0	25.0	22.0	3247	0.15
2 1/2	3/8	5.39	4.17	1.61	1.10	1350	0.96
65	M12	137.0	106.0	41.0	28.0	6009	0.44
3	3/8	6.30	4.49	1.93	1.10	1350	1.07
80	M12	160.0	114.0	49.0	28.0	6009	0.49
4	3/8	7.76	4.96	1.65	1.10	1430	1.32
100	M16	197.0	126.0	42.0	28.0	6365	0.60
5	3/8	9.25	5.98	2.17	1.10	1430	1.65
125	M16	235.0	152.0	55.0	28.0	6365	0.75
6	3/8	10.87	6.54	2.24	1.50	1940	2.68
150	M20	276.0	166.0	57.0	38.0	8635	1.22
8	3/8	14.02	8.07	2.91	1.50	2000	3.75
200	M22	356.0	205.0	74.0	38.0	8900	1.70
10	3/8	17.56	10.08	3.54	1.89	3600	7.74
250	M22	446.0	256.0	90.0	48.0	16020	3.51
12	3/8	20.91	11.77	4.25	1.89	3800	11.62
300	M22	531.0	299.0	108.0	48.0	16910	5.27