

Size Range: 3/4-12" (20-300mm) ductile or cast iron pipe

Material: Carbon steel

Finish: Plain or Hot-Dip Galvanized with Zinc Plated Bolts & Nuts


Service: Recommended for the suspension of stationary ductile iron or cast iron pipe.

Maximum Temperature: Plain 343°C/650° F, Galvanized 232°C/450° F

Approvals: Complies with Federal Specification A-A-1192A (Type 1) WW-H-171-E (Type 1), ANSI/MSS SP-69 and MSS SP-58 (Type 1).

Installation: Hanger rod nut above clevis must be tightened securely to assure proper hanger performance.

Adjustment: Vertical adjustment without removing pipe may be made from 1 15/16" through 3 3/16", varying with the size of the clevis. Tighten upper nut after adjustment.

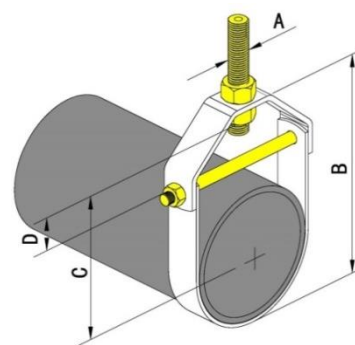

Pipe Size	Rod Size A	B	C	D	Width	Max Load	Approx. Wt. Ea.
In/mm	In/mm	In/mm	In/mm	In/mm	In/mm	Lbf/N	Lbs./kg
¾	¾	2.76	1.61	0.67	0.87	610	0.22
20	M10	70.0	41.0	17.0	22.0	2713	0.10
1	¾	3.27	1.89	0.87	0.87	730	0.27
25	M10	83.0	48.0	22.0	22.0	3247	0.12
1¼	¾	3.15	1.85	0.71	0.87	730	0.26
32	M10	80.0	47.0	18.0	22.0	3247	0.12
1½	¾	3.54	2.09	0.79	0.87	730	0.31
40	M10	90.0	53.0	20.0	22.0	3247	0.14
2	¾	4.37	2.64	0.98	0.87	730	0.34
50	M10	111.0	67.0	25.0	22.0	3247	0.15
2½	½	5.39	4.17	1.61	1.10	1350	0.96
65	M12	137.0	106.0	41.0	28.0	6009	0.44
3	½	6.30	4.49	1.93	1.10	1350	1.07
80	M12	160.0	114.0	49.0	28.0	6009	0.49
4	¾	7.76	4.96	1.65	1.10	1430	1.32
100	M16	197.0	126.0	42.0	28.0	6365	0.60
5	¾	9.25	5.98	2.17	1.10	1430	1.65
125	M16	235.0	152.0	55.0	28.0	6365	0.75
6	¾	10.87	6.54	2.24	1.50	1940	2.68
150	M20	276.0	166.0	57.0	38.0	8635	1.22
8	¾	14.02	8.07	2.91	1.50	2000	3.75
200	M22	356.0	205.0	74.0	38.0	8900	1.70
10	¾	17.56	10.08	3.54	1.89	3600	7.74
250	M22	446.0	256.0	90.0	48.0	16020	3.51
12	¾	20.91	11.77	4.25	1.89	3800	11.62
300	M22	531.0	299.0	108.0	48.0	16910	5.27